

SQUBE 2.0 ON TRACK

04-Feb.-2017

2.0 LED

LED 12W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE IP20 0,3m 24° 90° 355°





white texture	144364W
black texture	144364B

LIGHT COLOUR


2700K >80CRI 780lm	2
3000K >80CRI 810lm	4

OPTIONAL

dimmer	90019017
for switch	
for din rail	90019018

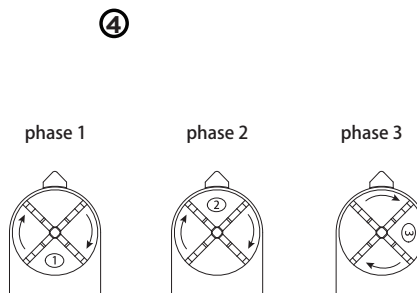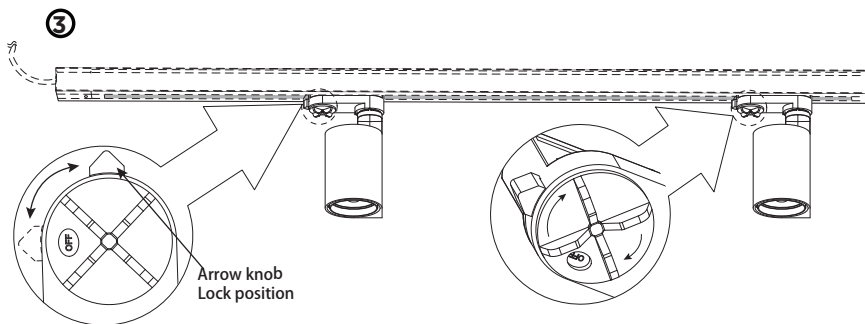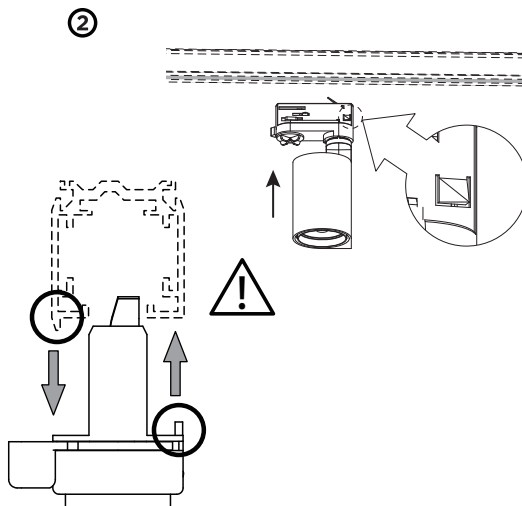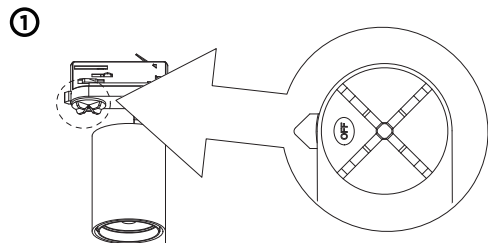

DIMENSIONS



MOUNTING INSTRUCTION

- ① Make sure the knob is on the OFF position.
- ② Push the fixture into the track.
- ③ Turn the knob to the Lock position.
- ④ Select the phase.

The light source of the integrated LED is not replaceable;
When the light source reaches its end of life the whole
luminaire shall be replaced.



Caution, risk of electric shock



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducré bvba Kwadestraat 153 bus 2.1 8800 Roeselare

INSTALLATION
INSTRUCTIONS